


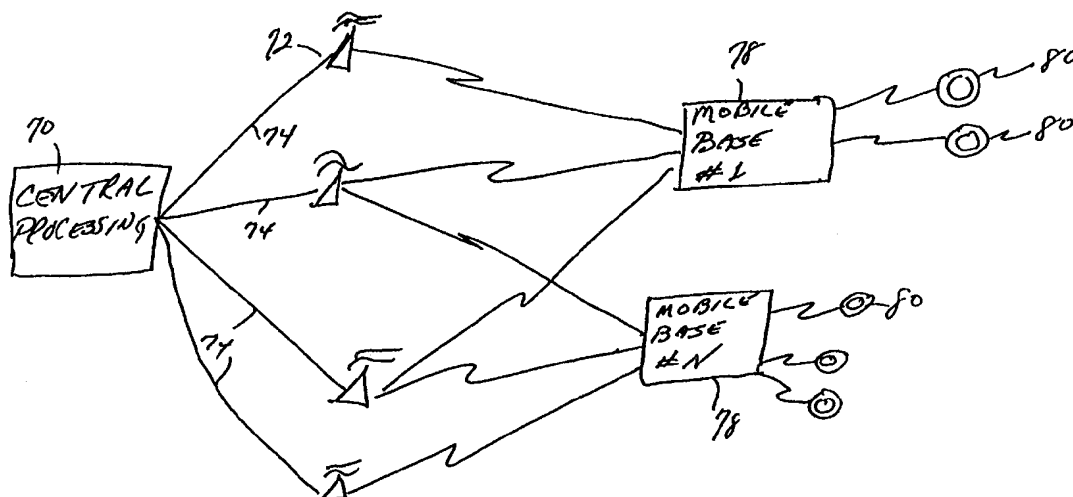

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>G01S 5/00, 5/14</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/63357</b> <b>(43) International Publication Date:</b> 9 December 1999 (09.12.99)
<b>(21) International Application Number:</b> PCT/US98/11473 <b>(22) International Filing Date:</b> 4 June 1998 (04.06.98) <b>(71) Applicant:</b> HARRIS CORPORATION [US/US]; 1025 West Nasa Boulevard, Melbourne, FL 32919 (US). <b>(72) Inventor:</b> OTTO, James, C.; 510 Inwood Lane, Indian Harbor Beach, FL 32937 (US). <b>(74) Agent:</b> NIYOGI, Bidyut, K.; Harris Corporation, International Patent Operations, 1025 West Nasa Boulevard MS80, Melbourne, FL 32919 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** A REMOTE MOBILE MONITORING AND COMMUNICATION SYSTEM

**(57) Abstract**

A system and method for monitoring the location and/or presence of an object/person within a desired area includes a mobile base station (78), a central control center (70), a mobile signaling device (80) carried by the monitored object/person (80), and a geolocating means. The mobile base station (78) may be transported to an arbitrary site and retains the monitored object/person (80) within a desired area. The central control center (70) determines the acceptability of the location of the monitored object/person (80) and may raise an alarm condition when the monitored object/person is not within the desired area.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## A REMOTE MOBILE MONITORING AND COMMUNICATION SYSTEM

The present invention relates to systems for communication with and for monitoring the locations of mobile, remote objects, including people. More particularly, the present invention relates to a system for locating and communicating with the objects (including people) without burdening the monitored object with heavy or bulky communications equipment.

5 Known systems illustrate the various needs for the present invention and that those efforts only partially meet these needs. For example, house arrest systems continuously monitor persons sentenced to remain within a defined, restricted area to assure they do in fact remain within the permitted area. These systems offer continuous oversight but suffer from being able to monitor the offender only at a single fixed location, e.g., his home.

10 Other known prisoner monitoring systems attempt to accommodate the offender sentenced to remain principally within one area but is allowed to travel to a second area during limited times, e.g., the offender must remain at her home except during working hours when she may travel to her place of business. However, these systems are not able to continuously monitor the offender and have limited monitoring areas or distances.

15 Another type problem exists regarding the need to quickly recover stolen vehicles. Certain type vehicles or assets, known as favorite targets of car thieves, may have installed vehicle tracking systems. These vehicle tracking systems, powered by the vehicle's battery and not unduly limited in size or transmission power capability, allow authorities to track the location of the vehicle over an extended range and for an extended period of time. Such systems, however, do not notify the owner that the vehicle has been stolen and the vehicle is often  
20 transported out of the searchable area or disassembled before the theft is discovered and the recovery system activated. A need is therefore present to promptly notify the vehicle owner that the vehicle has been stolen.

In a similar fashion, an automated notification system is needed to notify the proper  
25 authorities when an asset has been moved from a given location. For example, in banks it is known to hide a small explosive device coupled with a permanent dye within one or more bundles of currency. When the dye-carrying bundle is removed from the bank, a signal is provided to the explosive device causing it to detonate, spewing the dye upon the currency and persons nearby. One problem with such devices is the fact that innocent passers-by may be  
30 injured by the impact from the explosion and the fact that the thief may become more violent in response to the explosion. Accordingly, it is desirable to use a proximity locating device within such currency bundles. The passage of the proximity device outside the range of a base unit

could be made to cause an alarm to be signaled at the appropriate authorities and, if desired, to initiate geolocating the locating device within the currency bundle, all without alerting the thief or causing explosions in the vicinity of potentially innocent persons.

The specification of U.S. Patent No. 4,918,432 illustrates a known system wherein the  
5 monitored individual's movement is limited to a single fixed area, and discloses a system comprising an small transmitter in the form of an identification tag which is worn by the monitored individual and which transmits a periodic signal directly to a Field Monitoring Device (FMD) or, if the fixed area has communication dead spots, via a repeater to the FMD. The FMD then communicates to a central, fixed location, e.g., by modem and telephone line, to notify the  
10 central location when the monitored individual leaves or re-enters the monitored area. If the monitored individual leaves the fixed area, the central location is not aware of the individual's location. Disadvantageously, no provision is made for the central location to communicate with the individual or the individual to communicate with the central location. Such features are necessary if the system is being used to monitor and communicate with an individual who is  
15 under protective custody such that they must be able to free move about without carry heavy, bulky equipment and such that they must be in ready contact with central monitoring site to transmit or receive a panic signal.

The specification of U.S. Patent No. 5,461,390 illustrates a known effort to provide intermittent mobile monitoring of an individual by periodically contacting and determining the  
20 location of a locator device attached to the individual in the form of a small transceiver strapped to the individual's leg. The central location initiates a monitoring cycle by transmitting a polling signal, via a wireless, e.g., cellular, system to the locator. Upon receipt of the polling signal, the locator queries a positioning system to ascertain its current location and transmits the location back to the central computer. The central computer then completes the monitoring cycle by  
25 comparing the individual's location against database records to determine if the individual is within at an authorized location. While this system offers a degree of mobility for the monitored individual, requirements to keep the locator device small and lightweight, mandate compromises in transmission distances and frequency with which the locator can be polled. Therefore, continuous monitoring by the central location and communications at greater  
30 distances from the wireless transmission points between the central location and the locator device are not possible.

An object of the present invention is to obviate many of the known problems.

Another object is to provide a monitoring and communication system whereby a primary

base location may continuously monitor a remote, mobile individual, affixed with a personal transceiver, through indications that the individual is within a defined area around a mobile but determinable location by supplementing the primary base location with a transportable, remote base operably maintaining communications between both the primary base location and the  
5 mobile individual.

Another object is to provide a monitoring and communication system whereby a fixed base location's continuous monitoring a remote, mobile individual is enhanced by the fixed base location selectively varying the size of the defined area within which the mobile individual is monitored, and also utilizing a principal base operatively in contact with a mobile individual  
10 through a remote, transportable base transmitting to the principal base information concerning location and proximity of the mobile individual, the degree of proximity selectively adjustable at the transportable base or by the mobile individual.

The present invention includes a system for monitoring an entity's location and for indicating that the entity has left a defined area around the location, the system comprising:

15 a mobile base for establishing a center from which the defined area is defined, said base comprising,

a portable power source so that said base may be transported,  
first proximity means for indicating that the entity has left the defined area, and  
means for transmitting the location of said base determined by said geolocating  
20 device and the indication that the entity has left the defined area provided by said first proximity means;

a tag for being carried by the entity comprising second proximity means operable with said first proximity means for setting a size of the defined area and determining that the entity has left the defined area;

25 a geolocating device for determining a location of said base; and,

a control center for monitoring the location of said base and for providing an indication that the entity has left the defined area, said control center comprising,

means for receiving transmissions from said base,  
means for selectively displaying the location of said base, and  
30 an alarm for indicating receipt of the indication that the entity has left the defined area.

The invention also includes a system for ascertaining whether an entity is within a defined area centered on a mobile base, said mobile base comprising a portable first power

source so that said base may be transported, a geolocating device for determining a location of said base, first proximity means for ascertaining whether the entity is within the defined area, said first proximity means being operable with a second proximity means carried by the entity for setting a size of the defined area and ascertaining whether the entity is within the defined area, means for transmitting the location of said base determined by said geolocating device and an indication of whether the entity is within the defined area provided by said first proximity means.

The invention furthermore includes a remote monitor, operating with a central site and a mobile transceiver to provide supervising and communicating functions, the remote monitor comprising a portable power source so that said monitor may be mobile, a communication section comprising, means for receiving information concerning the location of said monitor, means for transmitting information to and receiving information from said central site, means for transmitting information to and receiving information from said transceiver, a processing section comprising, means for determining the location of said monitor from said information concerning the location of said monitor and for causing said communication section to transmit said location to said central site to allow the central site to supervise said monitor's location, means for operably transmitting information to and receiving information from said transceiver and therefrom determining the distance between said monitor and said transceiver in order to supervise the distance between said monitor and said transceiver, means for determining the status of said transceiver from information received from said transceiver in order to permit said transceiver to communicate status reports to said monitor, means operable with said transceiver for setting a reference distance between said monitor and said transceiver in order to establish a distance of supervision between said monitor and said transceiver, means for establishing whether said transceiver is located within said reference distance and for causing said communication section to transmit said information to said central site so that said monitor may communicate whether said transceiver is within said established distance of supervision with said central site.

The invention will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 is a pictorial representation of one embodiment of the system .

Figure 2 is a pictorial representation of an alternative embodiment of the system .

Figure 1 illustrates an embodiment for use as a prisoner monitoring system which monitors the prisoner within a defined area about a mobile but constantly known location. The

system 10 may include three principal, interactive components: a transportable base 20, a prisoner bracelet or tag 30, and a primary control base 40.

The transportable base 20 includes a portable power source which enables the long-term, mobile movement of the transportable base and, accordingly, the prisoner; a geolocating device which enables the system to remain cognizant of the location of the transportable base; a first proximity device cooperatively operating with the prisoner bracelet 30 to monitor whether the prisoner is within the defined monitoring area 50; and a transmitter for continuously communicating with the primary control base its current location and an indication of whether the prisoner is within the defined monitoring area. Thus, by serving intermediate the prisoner bracelet and the primary control base and by remaining in constant communications with both the prisoner bracelet and the primary control base, the transportable base 20 facilitates continuous prisoner monitoring while allowing the prisoner an increased degree of mobility albeit while being electronically tethered to the transportable base.

The prisoner bracelet 30 (or "tag") is affixed to the prisoner in one of several known ways by a form-fitting strap to the leg or by close fitting rigid multi-piece bracelet around a forearm above the wrist. The bracelet 30 includes a second proximity device operable with the first proximity device of the transportable base 20. The transmission characteristics of the first and second proximity devices jointly define a monitoring distance, "r" 60, between the two devices originating at the transportable base. The area circumscribed about the transportable base by the monitoring distance, "r", determines the monitoring area 50. The monitoring distance 60, and hence the monitoring area 50, is desirably set a some amount less than the maximum communication range between the transportable base and the prisoner bracelet.

The unit could be used to monitor the location of school children on a field trip or outing, with the transportable base being carried in a school bus. In another embodiment, a system can be used to ensure that sentries are properly posted within a predetermined range of an object to be protected. Note that the ability of the transportable base to be moved and to geolocate enhances the usefulness of the invention as the transportable system may be readily established around any area needing security (such as the area surrounding a head of state while on tour.)

The transportable base may include conventional means such as signal strength, doppler effects, phase shifting, radio direction finding, Time Difference of Arrival ("TDOA") and radio frequency ranging for determining the set monitoring distance and the actual distance between itself and the bracelet.

The means for determining monitoring distance determine a distance from a receiver but

not a location with respect to the receiver. In an alternative embodiment, a system in accordance with the present invention may also include a transportable base unit having a monitoring means which can determine more than the distance a monitored object is from the base station but may also provide information regarding the location and/or relative location of the monitored object  
5 from the transportable base unit.

In such an alternative system, sentries in a defined area could be monitored to ensure not only that they have not left the defined area but that they are positioned with respect to one another to avoid "holes" in the perimeter of the monitored area. In such a system, each sentry could carry a mobile unit and be monitored by the transportable unit as to position. The  
10 transportable unit or the central unit may use the sentry position information to ensure that the sentries remain on post and have not unwittingly converged in one area, leaving another area unprotected.

Similarly, in an alternative embodiment, the system may be used to monitor mobile objects such as automated search equipment. In such an embodiment, the mobile equipment can  
15 be affixed, for example, to mobile sensor systems which are used to search a defined territory for a predetermined object. By monitoring the mobile units with the alternative base unit having the ability to locate the mobile units, the user of the system may ensure that the entirety of a given area has been searched.

In a preferred embodiment the transportable base and the prisoner bracelet communicate  
20 using an conventional RF scheme and protocol. Alternative means of communications include microwave, radio frequency, spread spectrum, and proprietary RF encoding/decoding schemes.

The primary control base 40, receiving communications from the transportable base, monitors the location of the transportable base and whether the prisoner has left the monitored area. In a preferred embodiment, the transportable base communications, received by the  
25 primary control base, consist of a location communication and an affirmative communication that the prisoner is within the monitored area. In an alternative embodiment, the transportable base communications consist of a location communication and a communication only if the prisoner leaves the monitored area. In yet another embodiment, the transportable base only sends location communications when the transportable base is mobile and its location is  
30 changing.

Geolocating of the transportable base may use any conventional geolocating technique and may be carried out by the transportable base or by another system. For example, the transportable base may use geolocating navigation satellites, inertial navigation, dead reckoning



based on self-contained sensors, or any of the many navigation aids currently available (such as LORAN and/or aircraft systems.) Alternatively, the transportable base may provide a signal or have an identifying characteristic such that other systems can determine the location of the transportable base and communicate the geolocation of the base to the central system. Examples  
5 of such systems include the use of a beacon emanating from the transportable unit which can be sensed and geolocated by existing radio receivers such as orbiting satellites or cellular base stations. In such a situation, the sensing unit may use conventional means to report the geolocation of the transportable base to the central location. If needed for a particular application, the transportable unit may be energized while moving, permitting the monitoring  
10 system to be operating even though it is not in a fixed location.

In another embodiment the transportable base and the primary control base communicate using RF communications. Alternative means of communications include microwave, radio frequency, spread spectrum, satellite link, computer network, direct digital (ISDN) and/or modulated signals over a telephone link. Generally, it is desirable that such  
15 signals between the base unit and the central unit be encrypted or encoded in such a way so that the system cannot be readily fooled or spoofed by intercepting or interfering signals.

The transportable unit may monitor a plurality of mobile units, such units providing either distance or location information, and each identifying itself to the transportable unit by conventional means.

20 The primary control base also includes means for selectively displaying the location of the transportable base and an "out-of-area" alarm for indicating receipt of an indication the prisoner has left the monitored area centered on the transportable base.

Because the bracelet requires only minimal circuitry to communicate with the transportable base and is not burdened with other functions such as geolocating or transmissions  
25 back to the primary control base, its power requirements are greatly reduced permitting long battery life in a small and unobtrusive package. Since the transportable base may be located at a convenient distance from the prisoner and may be concealed within an unobtrusive container such as an automobile trunk or a briefcase, the size and power consumption of the transportable base are less critical. The portable power supply may therefor be of convention design and sized  
30 to meet monitoring/transmission distance and duration requirements consistent with the specific prisoner monitoring application.

In an alternative embodiment, some of the components described as being in the transportable base may be included in the mobile unit and vice versa and still come within the

scope of the present application. For example, the geolocating capability may be contained in the mobile units which relay a relatively low power signal with the geolocation information to the transportable base unit. Because the mobile units communicate with a relatively nearby transportable base unit and not with a remote central unit, the power requirements for this embodiment of a mobile unit may be kept minimal to reduce the need for and weight of a large battery to be carried around by the mobile user.

In such instances the size of the monitored area by desirably be changed to increase or decrease the distance from the transportable base the monitored individual would be allowed to move without setting off an "out-of-area" alarm. As described, by varying the power and transmission characteristics of the first and second proximity devices, the monitoring distance, "r", between the two devices may be varied. To accommodate this, the transportable base may further include means for a local operator to vary the power to or the transmission characteristics of the first proximity device to vary the effective monitoring distance. In this way the monitored individual is provided with either a smaller or larger monitored area. Alternatively, the primary monitoring base may include a transmitter and the transportable base may include a receiving section so that the primary monitoring base may selectively change the monitoring distance by sending a signal to the transportable base.

In another alternative where the monitored individual is provided more information and control, the transportable base may transmit distance information to the bracelet which may include a distance indicator. In this embodiment, the bracelet may include a selector which causes the transmission of signals to the transportable base to selectively change the monitoring distance. the bracelet may further include a "panic button" which, upon depression, transmits a signal to the transportable base, which signal causes the transportable base to send a panic signal to the primary control base. The control base includes an alarm for indicating receipt of the panic signal.

Such a monitoring application may also require that the primary control base quickly contact the monitored individual. The control base may selectively transmit a signal to the transportable base, such signal causing the transportable base to transmit a signal to the bracelet. The bracelet may include a means to receive this signal and an alarm indicating the receipt of the signal.

Figure 2 shows an alternative embodiment which includes a central processing unit 70 which communicates with one or more substations 72 via conventional communications links 74. The substations 72 communicate with one or more mobile base stations 78, each of which

may be communicating with one or more monitored units 80.

The base stations 78 communicate with the monitored units 80 to ensure that the monitored units 80 remain within a desired proximity to the base station 78. The mobile base stations may determine their own geolocation (such as by a GPS locator) and send information  
5 regarding their location to the substations 72 or may provide a signal by which an external device or system may determine and report the geolocation of the mobile base 78 to the substation 72. As the mobile base stations 78 travel from one location to another, the base stations 78 may communicate with different substations 72 so that an entire region, covered by plural substations 72, may be within the permissible travel locations of the base stations 78. As  
10 the mobile stations travel from the area of one substation 72 to another, the control of and information regarding the mobile base stations 78 may be passed from one substation 72 to another, under the control of the central processing unit 70.

A system and method for monitoring the location and/or presence of an object/person within a desired area includes a mobile base station, a central control center, a mobile signaling  
15 device carried by the monitored object/person, and a geolocating means. The mobile base station may be transported to an arbitrary site and retains the monitored object/person within a desired area. The central control center determines the acceptability of the location of the monitored object/person and may raise an alarm condition when the monitored object/person is not within the desired area.

CLAIMS

1. A system for monitoring an entity's location and for indicating that the entity has left a defined area around the location, the system comprising:

5 a mobile base for establishing a center from which the defined area is defined, said base comprising,

a portable power source so that said base may be transported,

first proximity means for indicating that the entity has left the defined area, and

10 means for transmitting the location of said base determined by said geolocating device and the indication that the entity has left the defined area provided by said first proximity means;

a tag for being carried by the entity comprising second proximity means operable with said first proximity means for setting a size of the defined area and determining that the entity has left the defined area;

a geolocating device for determining a location of said base; and,

15 a control center for monitoring the location of said base and for providing an indication that the entity has left the defined area, said control center comprising,

means for receiving transmissions from said base,

means for selectively displaying the location of said base, and

20 an alarm for indicating receipt of the indication that the entity has left the defined area.

2. A system as claimed in claim 1 including means for selectively varying the size of the defined area set by said first and second proximity means from said control center, or said base.

3. A system as claimed in claims 1 or 2 including means for selectively varying the  
25 size of the defined area set by said first and second proximity means from said tag, and said means for transmitting and said means for receiving comprise a computer network, in which said base further comprises a means for determining the distance between said base and said tag.

4. A system as claimed in claim 3 wherein said base comprises a means for transmitting the distance between said base and said tag to said tag, and said tag has a means  
30 for indicating said distance to allow said entity carrying said tag to monitor the distance between said base and said tag, which comprises means also for selectively causing said base to transmit to said control center to allow said entity to signal said control center.

5. A system as claimed in claim 4 wherein said control center comprises an alarm

for indicating receipt of said signal transmission initiated by said entity and said base comprises an alarm for indicating the tag has initiated a signal transmission to the control center, in which said control center comprises means for selectively causing said base to transmit to said tag to allow said control center to signal said entity carrying said tag and said tag comprises an alarm  
5 for indicating receipt of said signal transmission initiated by said control center.

6. A system for ascertaining whether an entity is within a defined area centered on a mobile base, said mobile base comprising a portable first power source so that said base may be transported, a geolocating device for determining a location of said base, first proximity means for ascertaining whether the entity is within the defined area, said first proximity means  
10 being operable with a second proximity means carried by the entity for setting a size of the defined area and ascertaining whether the entity is within the defined area, means for transmitting the location of said base determined by said geolocating device and an indication of whether the entity is within the defined area provided by said first proximity means.

7. A system as claimed in claim 6 including a control center for monitoring the  
15 location of said base and for providing an indication that the entity is not within the defined area, said control center comprising means for receiving transmissions from said base, means for selectively displaying the location of said base, and an alarm for indicating receipt of the indication that the entity is not within the defined area, in which said control center comprises means for varying the size of the defined area set by said first and second proximity means.


20 8. A system as claimed in claims 6 or 7 wherein said base comprises means for varying the size of the defined area set by said first and second proximity means, including a second power source to provide said base with an alternative power source.


9. A system as claimed in any one of claims 6 to 8 wherein the base comprises an alarm activated upon the first proximity means ascertaining the entity is not within the defined  
25 area and a means for transmitting a notification signal to the second proximity means. The notification signal may be responsive to distance or selective from base or control center.

10. A remote monitor operating with a central site and a mobile transceiver to provide supervising and communicating functions, the remote monitor comprising a portable power source so that said monitor may be mobile, a communication section comprising, means for  
30 receiving information concerning the location of said monitor, means for transmitting information to and receiving information from said central site, means for transmitting information to and receiving information from said transceiver, a processing section comprising, means for determining the location of said monitor from said information concerning the

location of said monitor and for causing said communication section to transmit said location to said central site to allow the central site to supervise said monitor's location, means for operably transmitting information to and receiving information from said transceiver and therefrom determining the distance between said monitor and said transceiver in order to  
5 supervise the distance between said monitor and said transceiver, means for determining the status of said transceiver from information received from said transceiver in order to permit said transceiver to communicate status reports to said monitor, means operable with said transceiver for setting a reference distance between said monitor and said transceiver in order to establish a distance of supervision between said monitor and said transceiver, means for establishing  
10 whether said transceiver is located within said reference distance and for causing said communication section to transmit said information to said central site so that said monitor may communicate whether said transceiver is within said established distance of supervision with said central site.

11. A monitor as claimed in claim 10 including an alarm section operably connected  
15 to said processing section, the a first alarm activates responsive to the processor section determining the transceiver is not within said distance of supervision, the processor section further comprises a selectably enabled means to cause the communications section to send a signal to said transceiver upon determining said transceiver is not within said distance of supervision in order to communicate to said transceiver the distance between said transceiver  
20 and said monitor has exceeded said distance of supervision, in which the processor section further comprises means for causing the communication section to transmit said transceiver status reports to said central site, and upon the central site sending a message that it desires to communicate with the transceiver, the processor section also comprises means for determining the nature of said message and for causing the communication section to transmit said nature  
25 of said message to said transceiver.

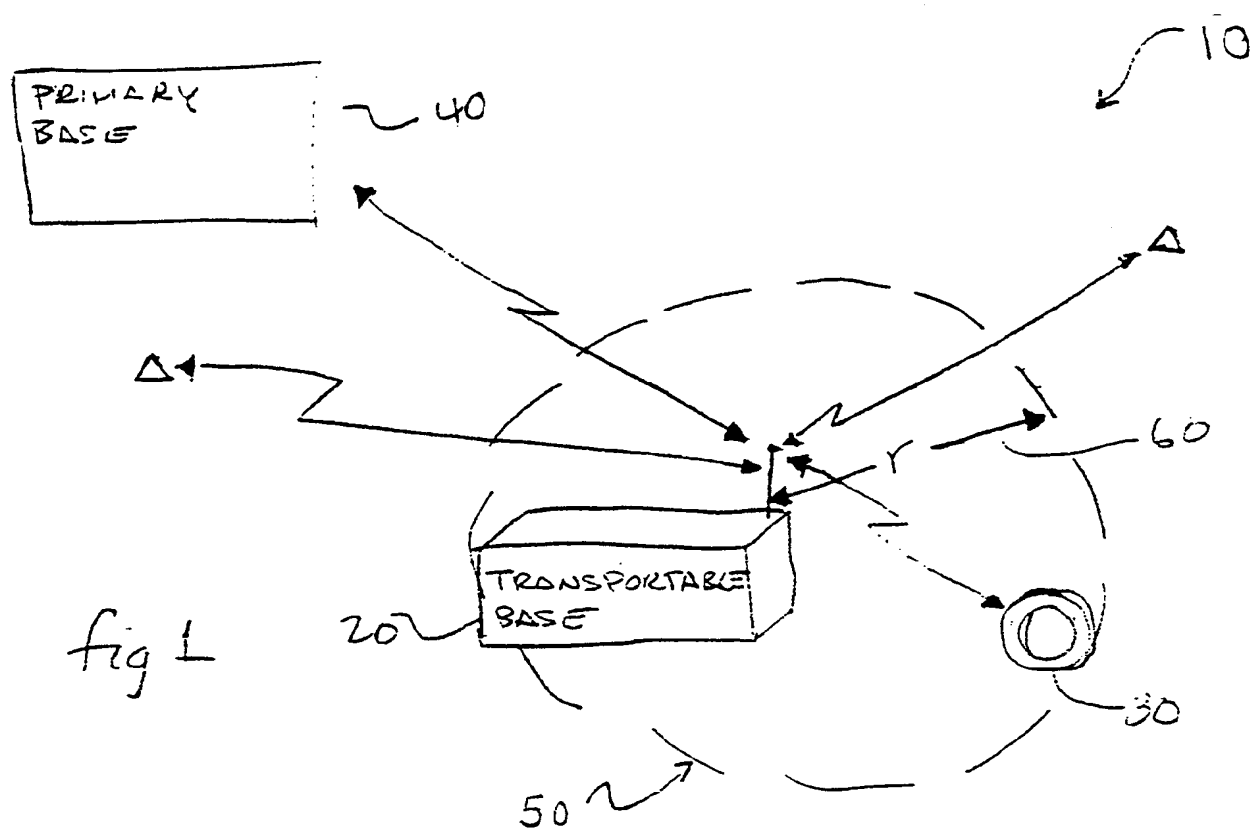

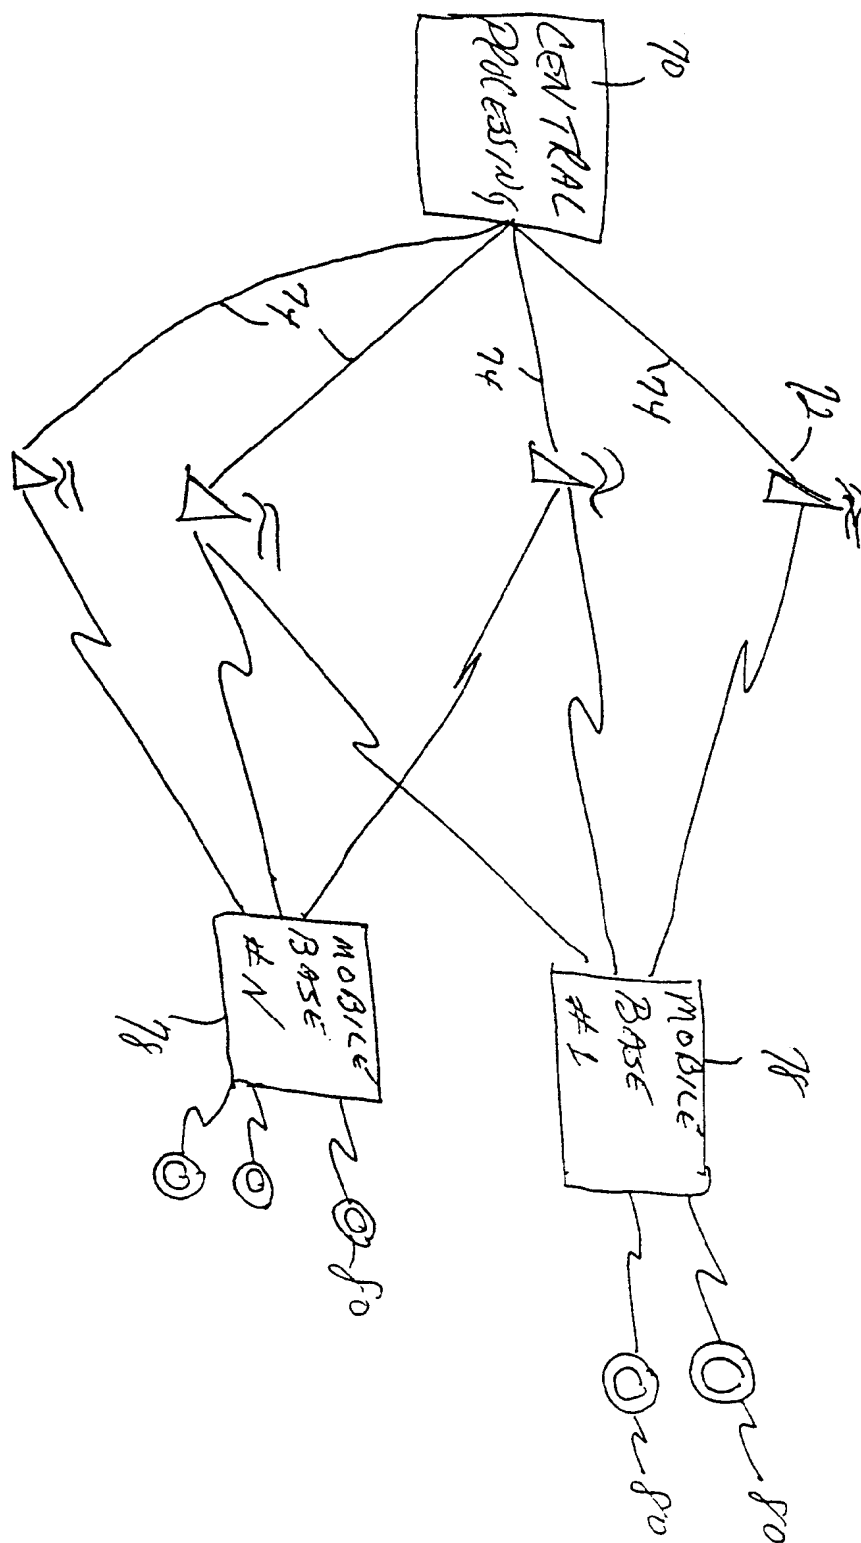



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/11473

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G01S5/00 G01S5/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 396 227 A (CARROLL GARY T ET AL) 7 March 1995 see column 3, line 47 - column 3, line 57 see column 5, line 56 - column 10, line 5 see column 12, line 35 - column 15, line 55 see column 23, line 33 - column 23, line 53; figures 1-6	1-11
X	US 5 189 395 A (MITCHELL MICHAEL S) 23 February 1993 see column 4, line 11 - column 12, line 2; figures 1-6	1-11
X	US 5 355 511 A (HATANO RIKUO ET AL) 11 October 1994 see column 2, line 43 - column 7, line 40; figures 1-5	1-11
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

2 December 1998

Date of mailing of the international search report

10/12/1998

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Cannard, J-M

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/11473

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 748 085 A (GEN ELECTRIC) 11 December 1996 see page 2, line 52 - page 6, line 53; figures 1,2 ---	1-11
A	EP 0 504 513 A (D G R INC) 23 September 1992 see column 2, line 9 - column 14, line 55; figures 1,2 ---	1,6,10
A	WO 96 25673 A (NEXUS 1994 LTD) 22 August 1996 see page 4, line 14 - page 7, line 3; figures 1,2 -----	1,6,10

# INTERNATIONAL SEARCH REPORT

information on patent family members

In. tional Application No

PCT/US 98/11473

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5396227	A	07-03-1995	US 5266944 A CA 2111444 A EP 0591423 A WO 9300663 A	30-11-1993 07-01-1993 13-04-1994 07-01-1993
US 5189395	A	23-02-1993	NONE	
US 5355511	A	11-10-1994	JP 4095791 A	27-03-1992
EP 0748085	A	11-12-1996	US 5691980 A CA 2176869 A JP 9171571 A	25-11-1997 08-12-1996 30-06-1997
EP 0504513	A	23-09-1992	US 5032845 A	16-07-1991
WO 9625673	A	22-08-1996	US 5596330 A EP 0813689 A	21-01-1997 29-12-1997